

Intel's most popular PROM devices. This personality module supports the following PROM devices:

2716 2732 2732A 2764 27128 2815 2816

As shown in Figure 4, the iUP-F27/128 personality module contains two sockets: one for 24-pin PROM devices and the other for 28-pin PROM devices. The user can use only one socket at a time. An LED below the socket indicates the correct socket to use based on the PROM device type selected, and a row of green LEDs on the right side of the personality module indicate which PROM type is selected. The ACTIVE SOCKET LED indicates when power is being applied to the PROM device and when the universal programmer/iPDS system is accessing the selected socket.

The iUP-F27/128 Personality Module

The iUP-F27/128 personality module lets the user program, read, and verify the contents of a wide variety of PROM devices, including some of

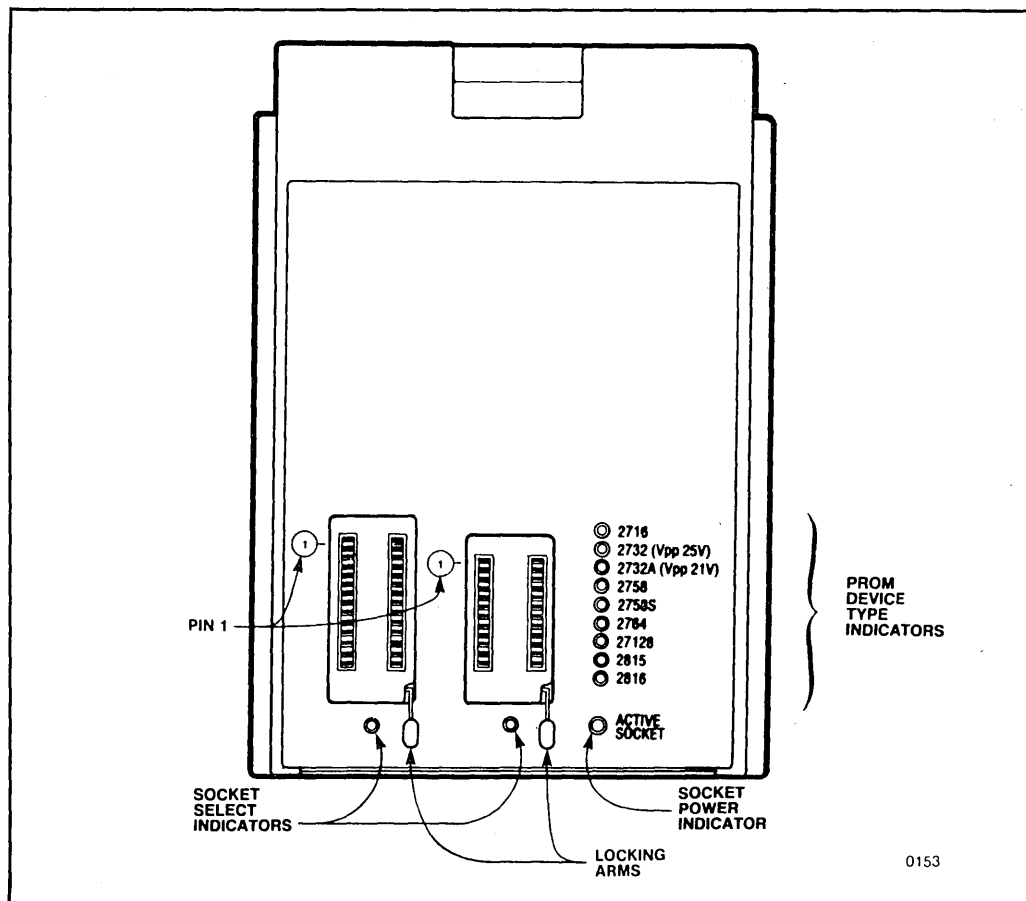


Figure 4. iUP-F27/128 Personality Module